

**(19) World Intellectual Property Organization
International Bureau**



A standard linear barcode is located at the top of the page, spanning most of the width. It is used for document tracking and identification.

**(43) International Publication Date
2 October 2003 (02.10.2003)**

PCT

**(10) International Publication Number
WO 03/081905 A1**

(51) International Patent Classification⁷: H04N 5/44

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/GB03/01259

(22) International Filing Date: 24 March 2003 (24.03.2003)

(25) Filing Language: English

(30) Priority Data:

(71) **Applicant and**
(72) **Inventor: REES, Ian, Paul** [GB/GB]; 4 Furze Road, Addlestone, Weybridge, Surrey KT15 1DP (GB).

(74) **Agent: BUTLER, Lance;** Barker Brettell, 10-12 Priests Bridge, London SW15 5JE (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IMPROVEMENTS IN CONNECTIONS FOR AUDIO/VISUAL DISPLAY MONITORS

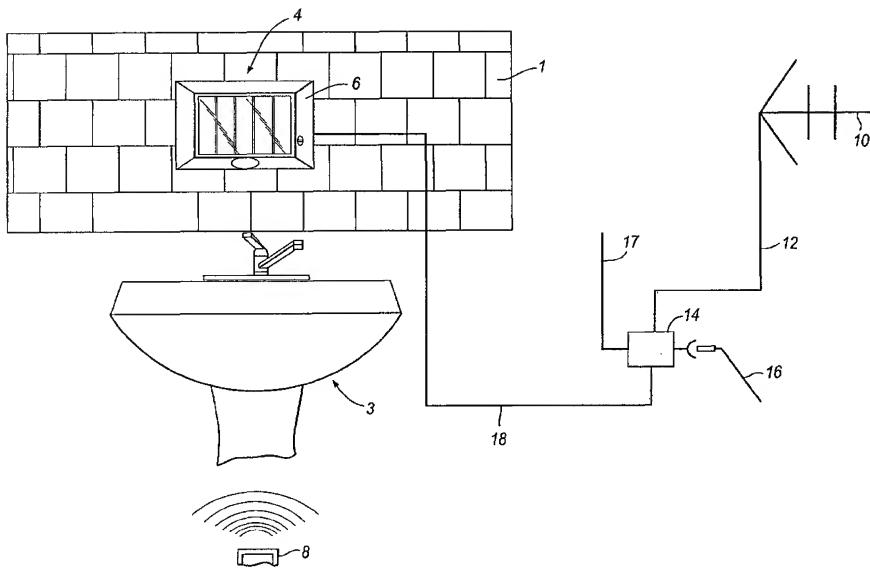

WO 03/081905 A1

(57) Abstract: A system for conducting data streams and power to a remote monitor (4) having a screen includes one coaxial (18) carrying both the data stream(s) and the power to the remote monitor (4).

IMPROVEMENTS IN CONNECTIONS FOR AUDIO/VISUAL DISPLAY MONITORS

5 [0001] This invention concerns improvements in connections for audio/visual display monitors.

10 [0002] Our co-pending UK Patent Application No 0121005.3 discloses *inter alia* a connector for connecting a decoder to an audio/visual remote monitor having a screen, the connector comprising a cable conforming to CAT5 protocol and a junction box at one end portion thereof for connecting an electrical input, an audio/video input and an infrared input whereby control of the decoder can be effected by a remote controller directing infrared signals to a receptor of the monitor.

15 [0003] The invention the subject of that Application is primarily concerned with the provision of a connector suitable for a waterproof television unit adapted for deployment in a room such as a bathroom where there is exposure to moisture that could 20 adversely affect the operation of the unit.

25 [0004] An object of the present invention is to provide an improved system for conducting data stream(s) and power to a remote monitor having a screen.

[0005] A further object is to provide a waterproof television unit and a waterproof remote controller.

30 [0006] According to the invention a system for conducting data stream(s) and power to a remote monitor having a screen is

characterised by a single cable adapted to carry both data stream(s) and power to the remote monitor.

5 [0007] The single cable may be a coaxial cable or a 4 twisted pair cable, *e.g.* a CAT5 cable or any of its predecessors (CAT 3 and CAT 4) or its successors (CAT5E and CAT6).

10 [0008] In practice low voltage is coupled with the data stream, *e.g.* the RF and sent through the cable to power a television unit and associated electronics thereby obviating the need for additional cabling and high voltage.

15 [0009] The invention includes a power combiner unit for the transmission of power and RF to the television unit which may conveniently be waterproof to the extend that it can be deployed in a bathroom or other environment in which water or water vapour may be encountered. A waterproof housing may be provided for the fixing of the television unit within or on the wall of such an environment.

20 [00010] A waterproof control may also be provided and *in situ* may be mountable within or on a wall, for example a bathroom wall opposite the television unit and in easy reach of the occupant.

25 [00011] In one example of the invention a remote control arrangement involves the extension by the use of 4 twisted pair cable of the internal controller board, which controls the functions of power on/off, channel control, volume control, channel tuning and remote control IR reception.

5 [00012] The television unit conveniently uses thin film technology (TFT) and incorporates speakers and an RF tuner which may be controllable by a waterproof membrane switch on the front of the unit. The complete unit is conveniently waterproofed as a whole rather than as individual elements. Reverse infrared may also be available to control other audio/visual equipment should this be required.

10 [00013] The monitor screen of the television unit may conveniently be provided with a heating circuit to counter condensation difficulties and an automatic override timer may also be provided. The heating circuit is preferably arranged as an internal heater which is adapted to elevate the internal temperature of the entire enclosure as well as the front panel thereby preventing internal and 15 external condensation.

20 [00014] By way of example only, one embodiment of a system according to the invention for conducting data streams and power to a remote monitor including a screen is described below with reference to the accompanying drawing which is a diagrammatic representation.

25 [00015] Referring to the drawing there is shown a wall 1 of a bathroom having the usual equipment, a basin on a pedestal being shown by way of example at 3, in which a television unit 4 having a thin film technology (TFT) audio/visual monitor is disposed within a water proof enclosure 6 set into the wall 1. The television unit 4 is also provided with an internal heater (not shown) which when activated serves to prevent condensation both 30 internally and externally. A remote controller 8 is mounted in or

on the opposite wall (not shown) from where the occupant is likely to be positioned for viewing.

5 [00016] An antenna 10 for receiving signals is located suitably in or on the residence in which the system of the invention is installed and is provided with a cable 12 leading to a power combiner unit 14 to which power is fed at low voltage by a conductor 16 and to which infrared control 17 is passed. A coaxial cable 18 then connects the power combiner unit 14 to the television unit 4 and thus carries both power and data streams (including RF signals) in the way of signals for the unit 4. The coaxial cable 18 also 10 carries the return infrared signal from the unit 4.

15 [00017] Although the specific example describes a coaxial cable it is to be understood that the invention embraces other single cables capable of providing the functions as described. In particular, a CAT5 protocol cable could be employed.

20 [00018] The invention thus obviates the need for a proliferation of cables since all the data signals and the power are carried in but one coaxial cable.

CLAIMS

1. A system for conducting data stream(s) and power to a remote monitor (4) having a screen is **characterised by** a single cable (18) adapted to carry both data stream(s) and power to the remote monitor (4).
5
2. A system according to Claim 1 **characterised in** that the single cable is a coaxial cable or a 4 twisted pair cable.
10
3. A system according to Claim 1 or 2 **characterised in** that low voltage is coupled with the data stream and sent through the coaxial cable (18) to power a television unit (4).
15
4. A system according to any one of the preceding claims **characterised by** a power combiner unit (14) for the transmission of power and the data stream(s) to the remote monitor (4).
20
5. A system according to any one of the preceding claims **characterised in** that the remote monitor (4) is waterproofed.
25
6. A system according to Claim 4 **characterised in** that the remote monitor (4) is provided with a waterproof housing.
30
7. A system according to any one of the preceding claims **characterised in** that the remote monitor (4) is provided with a heater unit.

8. A system according to any one of the preceding claims **characterised in that** waterproof control is provided.

5 9. A system according to any one of the preceding claims **characterised in that** the remote monitor (4) incorporates a television unit and an RF tuner with speakers.

10 10. A system according to Claim 9 **characterised in that** the remote monitor (4) incorporating the television unit, the RF unit and speakers is waterproofed as a whole in one assembly.


15 11. A system according to any one of the preceding claims **characterised in that** the data stream(s) include RF signals.

20 12. A system according to any one of the preceding Claim 4 and any claim dependent thereon **characterised in that** an antenna (10) is provided and is connected *via* a cable 12 to the power combiner unit (14) to which in use power is fed at low voltage by a conductor (16) and to which infrared control (17) is passed.

13. A system according to Claim 12 **characterised in that** the single cable (18) connects the power combiner unit (14) to the remote monitor (4).

25 14. A system according to Claim 11 **characterised in that** the single cable (18) in use also carries the return infrared signal from the remote monitor (4).

15. A system according to any one of the preceding claims
characterised in that a remote control arrangement involves the
extension by the use of 4 twisted pair cable of the internal controller
board, which controls the functions of power on/off, channel control,
volume control, channel tuning and remote control IR reception.

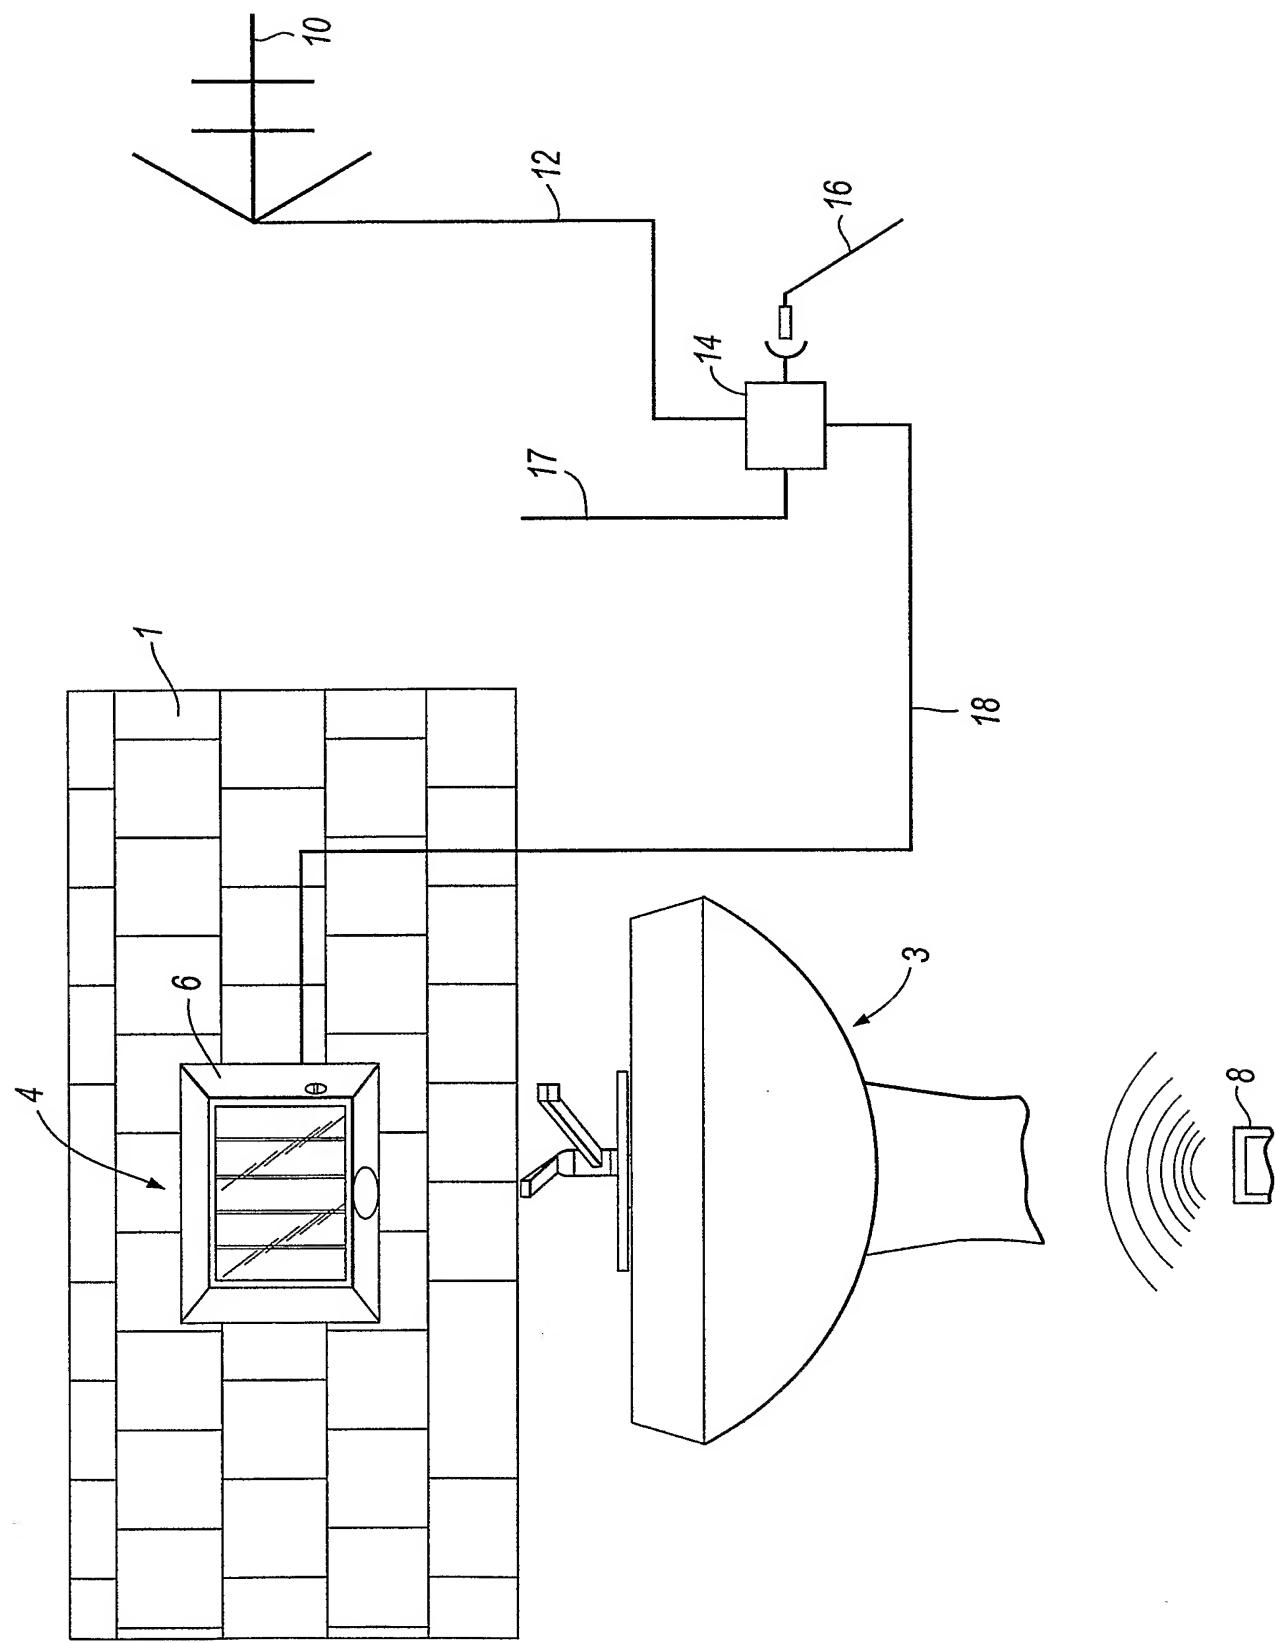

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01259

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N5/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N H04B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN & JP 11 341400 A (MUSASHI DENSEN KOGYO KK), 10 December 1999 (1999-12-10) abstract ---	1-14
Y	EP 1 134 909 A (BIWAVE TECHNOLOGIES) 19 September 2001 (2001-09-19) column 1, line 35 -column 3, line 24 column 4, line 8 -column 9, line 26 ---	1-6,8-14
Y	JP 02 285160 A (MATSUSHITA ELECTRIC IND CO LTD) 22 November 1990 (1990-11-22) abstract ---	7 -/-

 Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the International search report
19 June 2003	30/06/2003
Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Verschelden, J

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01259

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/001337 A1 (CHAUNCEY D. ET AL) 3 January 2002 (2002-01-03) page 1, paragraph 13 – paragraph 17 page 2, paragraph 22 – paragraph 27 page 5, paragraph 79 – paragraph 89 page 6, paragraph 106 ----	1-6,8-14
A	US 6 057 765 A (JONES T. ET AL) 2 May 2000 (2000-05-02) column 2, line 56 –column 3, line 24 column 12, line 63 –column 13, line 17 ----	1,2
A	GB 2 359 429 A (ITT MANUFACTURING ENTERPRISES INC.) 22 August 2001 (2001-08-22) page 4, line 21 –page 9, line 18 ----	1,2

INTERNATIONAL SEARCH REPORT

PCT/GB 03/01259

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
JP 11341400	A	10-12-1999	NONE			
EP 1134909	A	19-09-2001	EP	1134909 A1		19-09-2001
JP 02285160	A	22-11-1990	JP	2850367 B2		27-01-1999
US 2002001337	A1	03-01-2002	US	6463089 B1		08-10-2002
			US	6466607 B1		15-10-2002
US 6057765	A	02-05-2000	GB	2344423 A ,B		07-06-2000
GB 2359429	A	22-08-2001	AU	1016702 A		25-07-2002
			CA	2368628 A1		19-07-2002
			CN	1367609 A		04-09-2002
			EP	1227673 A2		31-07-2002
			JP	2002247458 A		30-08-2002
			US	2002100051 A1		25-07-2002

DERWENT-ACC-NO: 2003-768178

DERWENT-WEEK: 200432

COPYRIGHT 2010 DERWENT INFORMATION LTD

TITLE: Data stream conducting system for audio/visual display monitors, has cable carrying data stream and power to remote monitor with heater unit, and power combiner unit transmitting radio frequency signal to television unit

INVENTOR: REES I P

PATENT-ASSIGNEE: REES I P [REESI]

PRIORITY-DATA: 2002GB-006901 (March 23, 2002)

PATENT-FAMILY:

PUB-NO	PUB-DATE	LANGUAGE
WO 03081905 A1	October 2, 2003	EN
AU 2003226503 A1	October 8, 2003	EN

DESIGNATED-STATES: AE AG AL AM AT AU AZ BA BB BG
 BR BY BZ CA CH CN CO CR CU CZ
 DE DK DM DZ EC EE ES FI GB GD
 GE GH GM HR HU ID IL IN IS JP
 KE KG KP KR KZ LC LK LR LS LT
 LU LV MA MD MG MK MN MW MX MZ
 NI NO NZ OM PH PL PT RO RU SC S
 D SE SG SK SL TJ TM TN TR TT TZ
 UA UG US UZ VC VN YU ZA ZM ZW
 AT BE BG CH CY CZ DE DK EA EE
 ES FI FR GB GH GM GR HU IE IT
 KE LS LU MC MW MZ NL OA PT RO
 SD SE SI SK SL SZ TR TZ UG ZM
 ZW

APPLICATION-DATA:

PUB-NO	APPL-DESCRIPTOR	APPL-NO	APPL- DATE
WO2003081905A1	N/A	2003WO- GB01259	March 24, 2003
AU2003226503A1	Based on	2003AU- 226503	March 24, 2003

INT-CL-CURRENT:

TYPE	IPC DATE
CIPS	H04N5/44 20060101

ABSTRACTED-PUB-NO: WO 03081905 A1

BASIC-ABSTRACT:

NOVELTY - The system has a cable to carry both data stream and power to a remote monitor (4) with a heater unit. The cable (12) may be coaxial cable (18) or a 4 twisted pair cable. The stream is coupled with low voltage and sent through the cable to power a television unit. A power combiner unit (14) transmits power and a radio frequency (RF) signal to the television unit.

USE - Used for conducting data streams and power to audio/visual monitors.

ADVANTAGE - The system carries data signals and the power in one coaxial cable, thereby obviating the need for a proliferation of cables. The television unit is waterproof for installing in a wall of a bathroom. The heating circuit elevates the internal temperature of the entire system as well as a front panel, thereby preventing internal and external condensation.

DESCRIPTION OF DRAWING(S) - The drawing shows a data stream conducting system.

Remote monitor (4)

Antenna (10)

Cable (12)

Power combiner unit (14)

Infrared control (17)

Coaxial cable (18)

CHOSEN-DRAWING: Dwg.1/1

TITLE-TERMS: DATA STREAM CONDUCTING SYSTEM
AUDIO VISUAL DISPLAY MONITOR CABLE
CARRY POWER REMOTE HEATER UNIT
COMBINATION TRANSMIT RADIO
FREQUENCY SIGNAL TELEVISION

DERWENT-CLASS: W03 X25

EPI-CODES: W03-A09A; W03-A18C; W03-A20; X25-Y01;

SECONDARY-ACC-NO:

Non-CPI Secondary Accession Numbers: 2003-615360